





UNIQUELY LBTECH. SPECIALLY MADE FOR YOU!

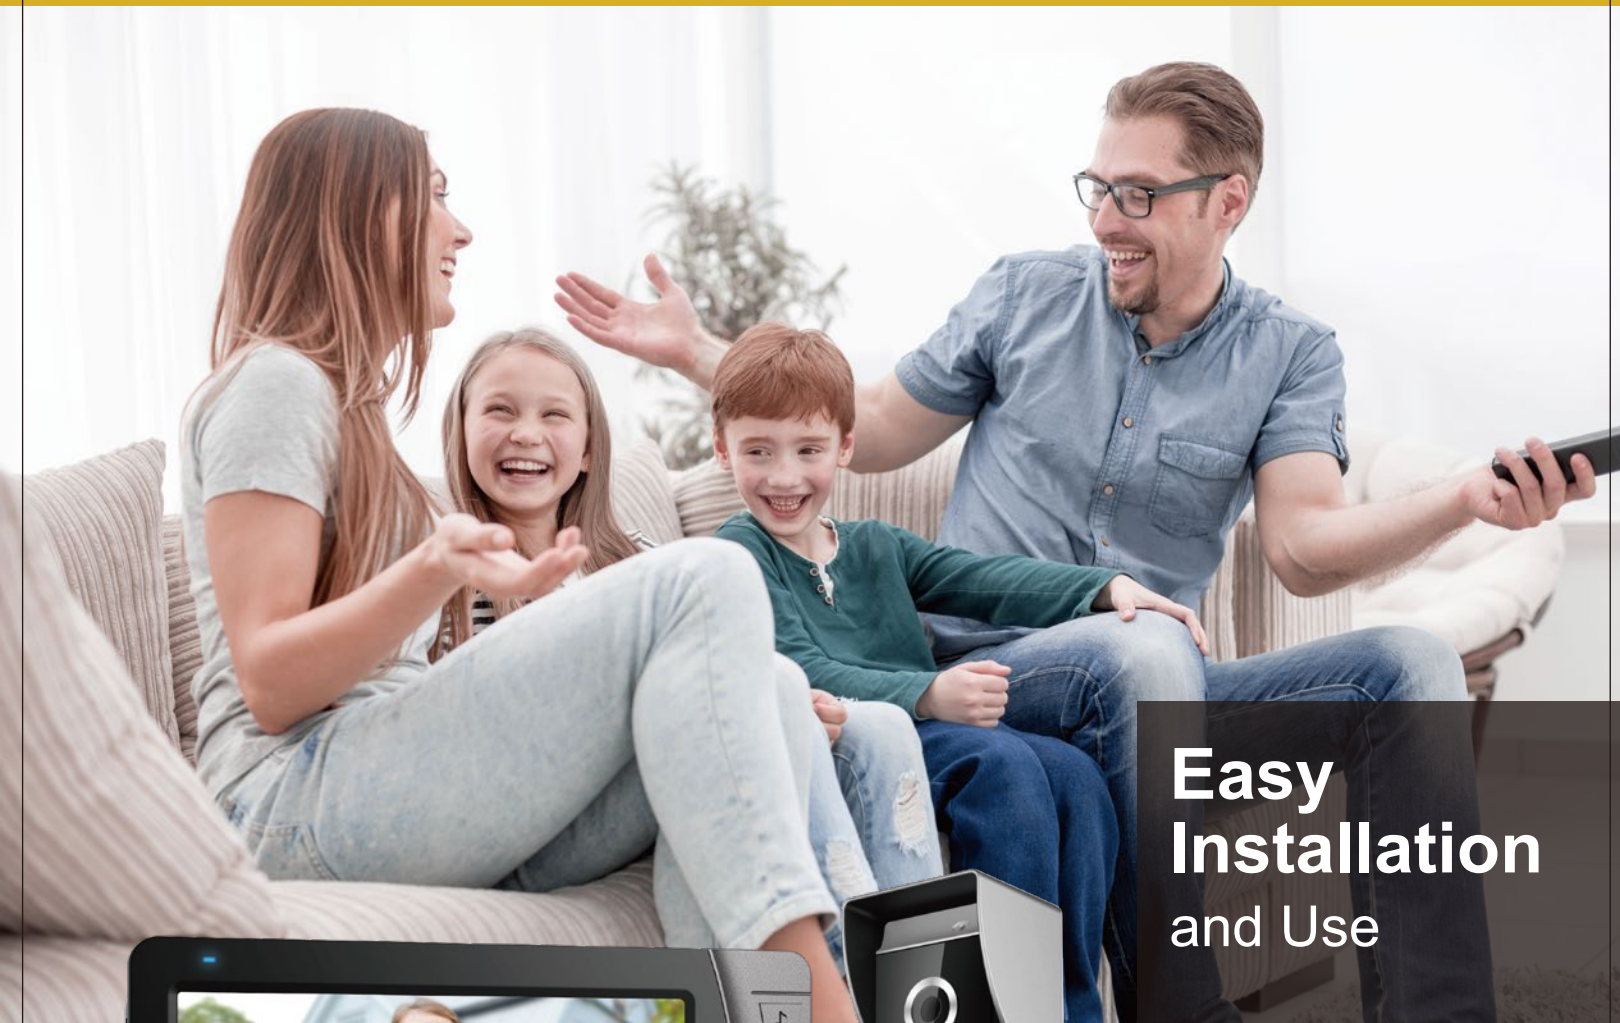

Easy Installation and Use


2-Wire 7" Analog Video Door Phone

MODEL: M2756

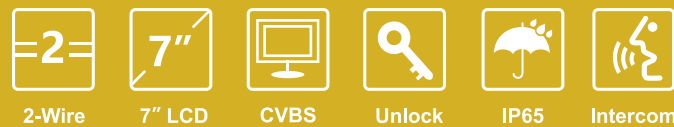


2-Wire 7" Analog Video Door Phone

INSTALLATION DIAGRAM

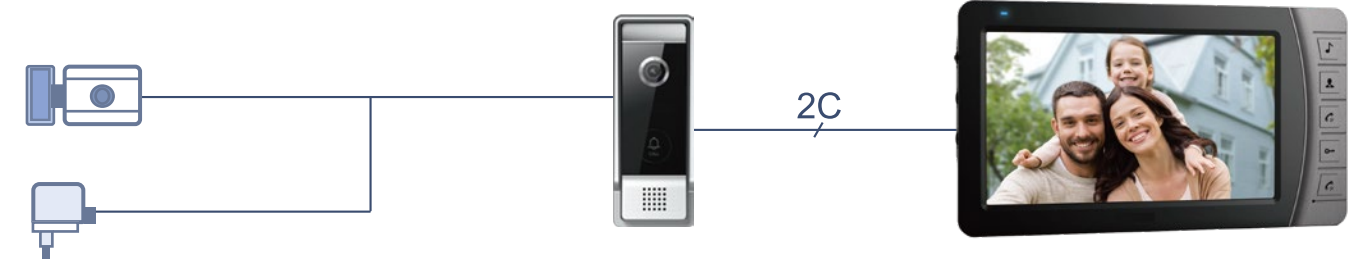

DIMENSIONS(MM)

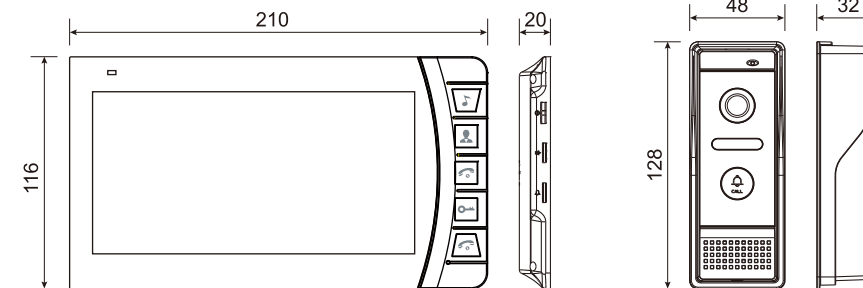

FEATURES

- 7" video door phone.
- Simple 2-wire connection.
- Easy menu operation.
- Easy ringtone switching.
- 1 door station+ 1 indoor monitor.
- CVBS signal input.

SPECIFICATIONS

Monitor		Door station	
Monitor screen	7" TFT LCD	Image sensor	1/4" 0.4MP CMOS
Resolution	1024(H) X 600(V)	IR-CUT	YES
Signal supports	CVBS	Definition	1000TVL
Video format	PAL/NTSC	Camera view angle	H:100°, V:55°, D:120°
Conversation mode	Hands-free full-duplex communication	LEDs for night	IR LEDs(120°) * 4pcs
Conversation duration	120s	Protection degree	IP65
SD card	No	Power consumption	3W Max.
Power consumption	6W Max.	Power supply	Supplied from indoor monitor
Power supply	DC 24V/0.75A	Working temperature	-20 C ~+50 C
Working temperature	-10 C ~+60 C	Installation method	Surface/Flush mount
Installation method	Surface mount		

ZhongShan LB Technology CO., LTD

Address: No.1 of Fuhua Road, Anfu District, Tanzhou Town,

Zhongshan City, Guangdong, China

Email: sales@lbtech.com.cn

Website: www.lbtech.com.cn



M2756